

WEAVERLINE HYDROSTATIC DRIVE FEED CART (LESS

ITEMNUMBER	DESCRIPTION	WEIGHT
521SS4	Feed Cart-21 Bushel-4 SS Augers	885
525SS4	Feed Cart-25 Bushel-4 SS Augers	955
531SS4	Feed Cart-31 Bushel-4 SS Augers	1000
537SS4	Feed Cart-37 Bushel-4 SS Augers	1112



Series 5 Silage Cart

Fast Feeding

High output-smooth running discharge auger and fast apron speed cuts feeding time. Unload a 30 bushel cart full of corn silage in 35 seconds.



Easy Feeding

Hydrostatic drive-one hand fingertip control lets you select any traveling speed in either forward or reverse.

All stainless conveyor system

- Stainless gap-link chain
- Stainless steel sprockets
- Stainless steel slats

WEAVERLINE FEED CART OPTIONS

ITEMNUMBER	DESCRIPTION	WEIGHT
CHARGER	Charger 24 Volt	28
HAYSPECIAL	For Long Hay-Factory Order-Add To Any Cart	
HIGHBOX	Factory Option-For Raised Mangers-Raises Discharge 13"-30"	
BAFFLE	Special Model-Helps Regulate Flow Of High Moisture Grain	
FSUNLOAD	Factory Option-Front And Side Unloading-Cart may be used as Standard or Front Unloading	
HDCASTER	Heavy Duty Caster Wheel (Std On Model 537)	
AIRTIRES	Pneumatic Tires With HD Caster-adds 6.5" to Cart Width- Includes 5.30/4/50x4 Ply Drive Tires w/tubes,Fender,Trough Extension, HD Hard Rubber Caster	
NOBATTERY	Deduct For No Batteries-\$400 (202966) (Exide GC4)	




Woodward Crossings, Inc.
www.WoodwardCrossings.com
814-349-4484
mail@woodwardcrossings.com

WEAVERLINE HYDROSTATIC DRIVE FEED CART (LESS WEAVERLINE FEED CART OPTIONS

Series 5 Specifications

	Model 537	Model 531	Model 525	Model 521
Cubic feet	46"	39"	31"	26"
Bushel capacity	37"	31"	25"	21"
Overall length	94"	82"	70"	70"
Overall width	33"	33"	33"	28"
Overall height	51"	51"	51"	51"
Discharge height	12"	12"	12"	12"

A	B	C/436	C/430	C/424	C/420
4.5 ft.	5 ft.	OK	OK	OK	OK
4 ft.	4.5 ft.	NO	OK	OK	OK
4 ft.	4 ft.	NO	12"-45"	OK	OK
4 ft.	3.5 ft.	NO	NO	6"-45"	OK
3.5 ft.	3.5 ft.	NO	NO	12"-45"	OK
3.5 ft.	3 ft.	NO	NO	NO	6"-45"

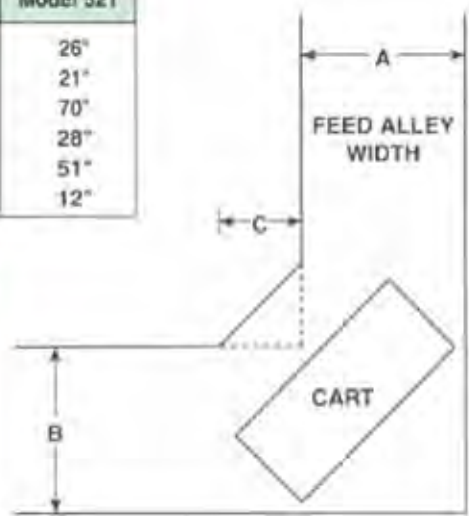

Convenient controls

All the controls are within easy reach of the operator. The voltmeter and hour meter allow for proper maintenance scheduling.

Variable discharge

Right hand control lever has eight positions-regulates augers, beaters, and six different feeding speeds. Center lever actuates augers.



Series 5 carts are standard with stainless steel auger flights.

Weaverline has over 20 years experience building stainless steel silage carts.



Advanced charging system

Unique charge system helps extend battery life. Developed by Weaverline technicians with over 30 years experience in battery powered vehicles.

Extended battery life

Series 5 carts are equipped with Exide E-3600 extended life batteries, field tested for durability and long life. Warranted for up to four years, many users have reported actual usage of up to twice as long.



Series 5 carts are equipped with stainless steel gap-hook chain and paddles. Developed by Weaverline engineers with rigorous testing the chain holds up in all kinds of feed materials.

The gap-hook chain allows the slat to be crimped around the sidebar of the link, thus avoiding the stress points of other methods of attaching. The chain is self-centering on narrow stainless steel sprockets which results in an extremely easy running, low wear, reliable conveyor system.



Woodward Crossings, Inc.
www.WoodwardCrossings.com
814-349-4484
mail@woodwardcrossings.com

WEAVERLINE BALE CHOPPERS FOR SMALL SQUARE SKID MOUNT AND 3 POINT MOUNTED BALE CHOPPERS

BALE CHOPPER - LANDSCAPE MULCHING

ITEMNUMBER	DESCRIPTION	WEIGHT
KB1355	Bale Chopper-Blower 13HP Honda Landscape Mulcher 56 Knives & Stationary Gooseneck for 6" Hose	650
KB1390	Bale Chopper-Blower 3PH PTO Landscape Mulcher 56 Knives & Stationary Gooseneck for 6" Hose	600

MULCHER OPTIONS

ITEMNUMBER	DESCRIPTION	WEIGHT
KB1410	Spout-Stationary Gooseneck For 6" Hose-Standard On KB1355/1390	18
KB1420ILO	Spout-Short Rotating Gooseneck For 6" Hose-In Lieu Of Std	20
KB1420	Spout-Short Rotating Gooseneck For 6" Hose-Outright Purchase	20
KB1425	Tall Rotating Spout - Hand Operated, For KB1355 - Not For Use w/ Hose-Outright Purchase	30
KB1425ILO	Tall Spout - Hand Operated Rotating Gooseneck, In Lieu Of Standard, Not For Hose	30
KB1415	Flex Hose 6"X30' W/Clamps	72
KB1416	Flex Hose 6"X40' W/Clamps	67
KB1417	Hose Handle Kit	5


MULCHMASTER

Cuts mulching time and puts mulch where you want it



The aggressive 56 knife rotor with a spiral design ensures an even power curve for uniform continuous cutting with less horsepower. This rotor, with its double V belt drive for efficient transfer of power, is the heart of the high capacity Weaverline bale choppers.

The top is easily removed for access.

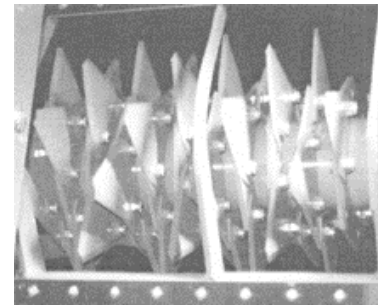

Save up to 80% on mulching time over mulching by hand.

Mulch a bale of straw in as fast as 30 seconds.

With optional flexible hose kits mulch can be placed easily in tight spots around decks and shrubs.

The Mulchmaster fits easily onto pickups, trucks or trailers. PTO driven KB1390 for Cat I 3 point tractors 25-40 HP.

Achieve an even, stable layer of mulch leaving work areas with a professional look.

Specifications:

56" long x 34" wide x 50" high
56 knives bolted to hex plates
Capacity: Approx. 120 bales per hr.
(Also available with 16HP Briggs & Stratton Vanguard Engine)



Woodward Crossings, Inc.
www.WoodwardCrossings.com
814-349-4484
mail@woodwardcrossings.com

WEAVERLINE BALE CHOPPERS FOR SMALL SQUARE

PUSH TYPE BALE CHOPPERS

ITEMNUMBER	DESCRIPTION	WEIGHT
KB1255	Bale Chopper 13HP Honda w/ Double Swivel Wheels	480




Model KB1255
Equipped to handle Straw, Hay, and Newsprint

- Cast Pillow Block Greasable 1 1/4" Self Aligning Bearings
- Cast Iron and Solid Steel Pulleys
- Completely Enclosed Oil Bath Gearbox
- Simple to Operate
- East to reach Controls are Properly Shielded
- Quiet and Smooth Running



Double V-Belt Drive for more efficient transmission of power and no belt slippage. A completely enclosed oil bath gearbox drives the Steel Bale Hopper which glides on four large 2 1/2" bearings.



Smooth Operating Adjustable Grate with Six Settings to Control Output and Chop Length.

76 knives welded to heavy replacement plates which slide easily on heavy duty 1 1/4" hex shaft allows easy replacement of worn blades. Plates can be flipped to use both knife edges.

BALE CHOPPERS FOR TMR MIXERS

ITEMNUMBER	DESCRIPTION	WEIGHT
KB1365	TMR-Blower Chopper w/ 56 knives, 6"x5' PVC Spout w/ elbow. Requires 5HP Electric Motor	530
KB1360	TMR-Blower Chopper w/76 Knives, 6"x5' PBC Spout w/ elbow. 5HP Electric Motor Included	650
KB1425A	Tall Rotating Spout - Hand Operated, For KB1365 - Not For Use w/ Hose-Outright Purchase	30



KB1365 With KB1425 Option



Woodward Crossings, Inc.
www.WoodwardCrossings.com
814-349-4484
mail@woodwardcrossings.com

WEAVERLINE SILAGE PACKER

ITEMNUMBER	DESCRIPTION	WEIGHT
2907	Silage Packer - 7 Roller - 93" Wide / CAT III	4560
2909	Silage Packer - 9 Roller - 123" Wide / CAT III	
2911	Silage Packer - 11 Roller - 153" Wide / CAT III	7500

SAVE TIME - SAVE FUEL and increase the value of your forage

The 2900 series packers take the advantages of earlier design Weaverline packers and bring it all together in a machine that helps you pack more effectively, which means more feed and less air in the trench.



A weighted roller increases the amount of feed in your trench and decreases the amount of air under the plastic. The 3 point roller provides excellent compaction without loading down your tractor with wheel weights.

MODEL	# ROLLERS	WIDTH	EMPTY WEIGHT	LOADED WEIGHT	RECOMMENDED HP
2907	7	93"	5200#	7000#	190
2909	9	123"	6700#	9000#	230
2911	11	153"	8200#	11000#	280+

All models are quick hitch compatible

Packing forage properly is very critical to material quality at feed-out time. Eliminating air pockets and "soft spots" is done easily with the Weaverline Silage Packer. While packing with a weighted tractor can be effective, tractor tires are designed to reduce compaction and distribute the weight. The Silage Packer, with steel wheels and the open wheel design can sink down as much as 12" if needed to eliminate soft spots. Thorough packing, done correctly, provides consistent forage density numbers throughout the entire trench.



30" steel wheels with a 3-inch wide stainless steel rim deliver approximately 1,000 pounds per wheel when the weight boxes are filled with sand. The heavy-duty 5" steel-tube axle is mounted with bronze bushings to the 1/2" steel frame. The gusseted wheel design helps to rake and level the pile when there is excess loose material on top, but the gussets are clear of the pack when proper density is achieved. The Weaverline packer has the outside wheels at the very edge of the machine, making it much easier to get a tight pack right up to the trench wall. The Weaverline Silage Packer is an efficient and very effective packing machine that will help to get consistent density numbers from top to bottom and wall to wall in your trench.



Woodward Crossings, Inc.
www.WoodwardCrossings.com
814-349-4484
mail@woodwardcrossings.com



WEAVERLINE AIR RAID DEBRIS BLOWER

ITEMNUMBER	DESCRIPTION
118	Debris Blower - Hydraulic Rotation / 3PH PTO



The Weaverline Air Raid debris blower is designed to quickly and efficiently remove leaves and debris from your path.

The Air Raid creates a powerful surge of wind, not noise. The blower is very quiet, making it an optimal choice for use on golf courses or in neighborhoods.

FEATURES

- PTO Driven
- For Tractors ranging from 20HP to 75HP
Cage fan rotates 360 degrees for best possible blowing angle
- Quiet – perfect for golf courses and neighborhoods
- 36" long x 36" wide x 40" long (length does not include PTO shaft)
- Unit weighs approximately 300 lbs.
- Produces approximately 6,000 CFM of air at 650 RPM



Woodward Crossings, Inc.
www.WoodwardCrossings.com
814-349-4484
mail@woodwardcrossings.com